

Status: 03/2018



Products need labeling
Label printers
for industrial applications



MACH 4S
Made in Germany

Key features



MACH 4S

Label printers for industrial applications

The **MACH 4S** provide all features of an industrial printer with a wide application range.

The print mechanics and the chassis are made of high-quality materials and perfectly match in terms of shape and function.

The large, colored touchdisplay with self-explanatory symbols offers best operability.

Labels and ribbons are easy to insert from the front.

The centered material guide eliminates any need of adjustments.

The hightech electronic board integrates all the needed interfaces as standard and is ready for any connection.

- reliable and fast printing
- accurate imprint
- compact, appealing design
- easy operation
- little footprint

Sample applications:

PCB labels

When only little space is available
– smallest label size 5 x 5 mm

Type plates

Pin sharp fonts, graphics and barcodes
up to 600 dpi

Cardboard box and pallet labels

up to a passage width of 120 mm



Types



Material guide
centered



1.1 Type B with tear-off edge

for printing on all materials that are wound on rolls or reels or fanfold.

Label printer		MACH 4.3S		MACH 4S	
Printable resolution	dpi	203	300	300	600
Print speed	up to mm/s	250	250	300	150
Print width	up to mm	104	108.4	105.7	105.7

1.2 Type P with peel-off function

for printing on all materials that are wound on rolls or reels or fanfold. In addition, the labels can be dispensed.

Label printer		MACH 4.3S		MACH 4S	
Printable resolution	dpi	203	300	300	600
Print speed	up to mm/s	250	250	300	150
Print width	up to mm	104	108.4	105.7	105.7
Label height	from mm	12			

1.3 Type C with cutter

for printing on all materials that are wound on rolls or reels or fanfold. From 12 mm in height, the labels and continuous materials can be cut.

Label printer		MACH 4.3S		MACH 4S	
Printable resolution	dpi	203	300	300	600
Print speed	up to mm/s	250	250	300	150
Print width	up to mm	104	108.4	105.7	105.7
Cutting length	from mm	12			
Gap height	up to mm	2.5			
Cuts/min, without material	up to	100			
Stop print job when		final cutter position has not been reached			

Accessories



2.14 External rewriter ER4/210

Label winding is either outside or inside. An adapter kit for exact alignment of the external rewriter is included in the delivery.

External rewriter		ER4/210
Material width	up to mm	120
Roll diameter	up to mm	300
Tightening axle for core diameter	mm	76
Winding		outside or inside

Details

1 Cover with a large panoramic window

It can be opened wide. The integrated damping mechanism provides smooth closing. Label stock is visible at any time.

2 Roll holder

The label roll is put onto the holder and, at this, is automatically centered. Materials of different widths can be placed within the box.

3 Ribbon holder

The ribbon is pushed onto the spring-mounted holder and is centered by means of a margin stop and the position indication. The insertion in the print mechanics is simple and comfortable.

4 Print mechanics

It opens at the push of a button and offers easy access.

5 Print heads

All print heads are freely interchangeable. They are automatically detected and calibrated by the CPU. Major data such as running performance, maximum operating temperature and heat energy are directly stored in the print head. The data can be read at the plant.

6 Gap sensor

It is arranged for labels or punch marks and end of material as well as for print marks in a centered position. In case of multi-track labels, you can switch to a sensor that is shifted 10 mm to the left.

7 Material guide


With the lateral retaining wheel the width is adjusted. At this, the labels are automatically centered.

8 Reflective sensor

Labels and end of material as well as print marks are identified by the slideable sensor.

9 Print roller DR4

It can be quickly and easily unlocked in few steps for cleaning or replacement. Coating: synthetic rubber

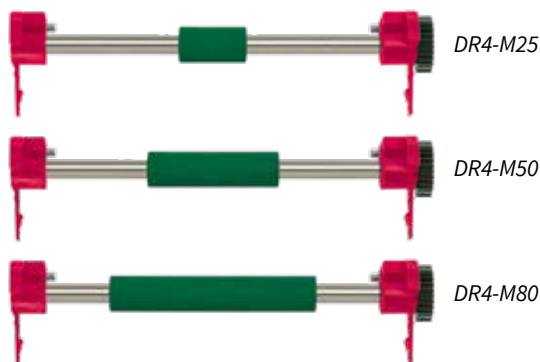

To achieve accurate imprint with slim materials and ribbons slim print rollers are needed. These prevent from print roller wear, print head contamination and errors during material feed.

10 Peel-off function (with "P" type)

The carrier tape is lead down behind the operation panel. The label separates from the carrier tape at the peel-off edge.








Operation panel

Intuitive and easy operation with self-explanatory symbols to configure the device setups

- 1 **LED signal:** Power ON
- 2 **Status bar:** Data reception, Record data stream, Ribbon warning, SD memory card / USB memory stick plugged in, Bluetooth, WLAN, Ethernet, USB Slave, Time
- 3 **Printer status:** Ready, Pause, Number of printed labels per print job, Label in peel-off position, Awaiting external start signal
- 4 **Buttons for**
 Cutter: direct cutting
 Tear-off or peel-off mode: print the next label

5 Operation

-  Jump to menu
-  Reprint last label
-  Interrupt and continue print job
-  Stop and delete all print jobs
-  Label feed



Setup options



Printing parameters



Print position Y

Fast setup with a slider,
fine setup with \pm keys



Print speed selection

via scroll function



Video tutorials

Scan QR code with a mobile device
and watch the explanatory video

Interfaces on the back of the device



- 1 for a **SD memory card**
- 2 **2 x USB host** to connect a Service Key, USB memory stick, keyboard, barcode scanner, USB Bluetooth adapter, USB WLAN stick
WLAN hotspot or infrastructure mode: In hotspot mode it is possible to directly connect a mobile device with the printer via WLAN.
- 3 **USB 2.0 Hi-speed device** to connect a PC
- 4 **Ethernet 10/100 BASE-T**
- 5 **RS232C** 1,200 to 230,400 baud/8 bit

Technical data

● Typical ○ Possible ■ Standard

Label printer		MACH 4.3S		MACH 4S	
Print head	Application	rough surroundings and thermal direct printing		type plates with small fonts or graphics	
	Characteristic	durable		sharp-edge print image	
Material feed and print head position		centered			
Printing method	Thermal transfer	●	●	●	●
	Thermal direct	●	●	○	-
Printable resolution	dpi	203	300	300	600
Print speed	up to mm/s	250	250	300	150
Print width	up to mm	104	108.4	105.7	105.7
Material¹⁾					
Paper, cardboard, PET, PE, PP, PI, PVC, PU, acrylate, Tyvec	on	roll, reel, fanfold			
Pressed continuous shrink tubes	on	roll, reel			
Textile tapes	on	roll, reel			
Labels	Width	mm	5 - 116		
	Height without label backfeed	from mm	5		
	peel-off, single cut	from mm	12		
	Maximum height	mm	2,000		
Carrier material	Thickness	mm	0.03 - 0.6		
	Width	mm	9 - 120		
Continuous material	Thickness	mm	0.03 - 0.13		
	Width	mm	5 - 120		
	Weight (cardboard)	up to g/m ²	0.05 - 0.5		
Shrink tubes	Weight (cardboard)	up to g/m ²	180		
	Width continuous	mm	5 - 85		
Roll, reel	Thickness	up to mm	1.1		
	Outside diameter	up to mm	205		
	Core diameter	mm	38.1 - 76		
	Winding		outside or inside		
Ribbon²⁾					
Ink side			outside or inside		
Roll diameter	up to mm		72		
Core diameter	mm		25.4		
Variable length	up to m		360		
Width	mm		25 - 114		
Printer sizes and weight					
Width x Height x Depth	mm		240 x 317 x 435		
Height when cover is open	mm		596		
Weight	kg		6		
Label sensor with position indication					
Gap sensor	for	labels or punch marks and end of material, print marks in transparent materials			
	Position	centered or shifted 10 mm to the left			
Reflective sensor from below	for	labels and end of material, print marks in not transparent materials			
	Position	adjustable from centre position 56 mm to the left or 10 mm to the right			
Height of material gap	up to mm		2		
Electronics					
Processor 32 bit clock rate	MHz		800		
Main storage (RAM)	MB		256		
Data storage (IFFS)	MB		50		
Slot for SD memory card (SDHC, SDXC)	up to GB		512		
Battery for time and date, real-time clock			■		
Data storage when power is off (e.g. serial numbers)			■		
Interfaces					
RS232C 1,200 to 230,400 baud/8 bit			■		
USB 2.0 Hi-speed device to connect a PC			■		
Ethernet 10/100 BASE-T			LPD, IPv4, IPv6, RawIP printing, DHCP, HTTP/HTTPS, FTP/FTPS, SMTP, SNMP, TIME, NTP, Zeroconf, SOAP web service, VNC		
2 x USB host on the back of the device for			Service Key, USB memory stick, keyboard, barcode scanner, USB Bluetooth adapter, USB WLAN stick		
Periphery connection for cutter or peel-off function			■		

¹⁾ The material specifications are standard values. Applications with small labels, very thin, slim, thick and stiff materials as well as labels with a strong adhesive need to be tested. ²⁾ The ribbon should at least correspond with the width of the carrier material.

Technical data

■ Standard □ Option

Operating data	
Power supply	100-240 VAC, 50/60 Hz, PFC
Power consumption	Standby < 10 W / typisch 150 W / maximal 300 W
Temperature / Operation	+5 - 40°C / 10 - 85 % not condensing
humidity	Storage 0 - 60°C / 20 - 85 % not condensing
	Transport -25 - 60°C / 20 - 85 % not condensing
Approvals	CE, FCC class A, CB, CCC, c UL
Operation panel	
	Touchscreen LCD color display
Screen diagonal	4.3"
Resolution (Pixel) W x H	480 x 272
Setup options	
Print Labels	Region: Language
Ribbon	Country
Tear-off	Keyboard
Peel-off	Time zone
Cut	Time
Interfaces	Display: Brightness
Error	Power safe mode
	Orientation
	Interpreter
Status bar	
Data reception	Bluetooth
Record data stream	WLAN
Ribbon warning	Ethernet
SD memory card plugged in	USB Slave
USB memory stick plugged in	Uhrzeit
Monitoring	
Ribbon winding	Print head tension
Ribbon pre-warning	Print head temperature
End of ribbon	Print head open
End of material	
Periphery error	
Test routines	
System diagnostics when	Device is switched on, including print head detection
Display information, status printout, analysis	Fonts list, type overview, WLAN status, label profile, test grid, monitor mode, recording print data on memory card
Status reports	- Printout of system settings, for example print lengths and running times - System status requests via software command - Display information such as network error, missing link, barcode error, periphery error, etc.
Fonts	
Font types	5 bitmap fonts including OCR-A, OCR-B and 3 vector fonts Swiss 721, Swiss 721 Bold, Monospace 821 are internally provided, TrueType fonts may be stored
Character sets	Windows 1250 to 1257, DOS 437, 737, 775, 850, 852, 857, 862, 864, 866, 869, EBC DIC 500, ISO 8859-1 to -10 and -13 to -16, WinOEM 720, UTF-8, Macintosh Roman, DEC MCS, KOI8-R All West and East European, latin, cyrillic, Greek, Hebrew and Arabic characters, Chinese and Thai are supported.
Bitmap fonts	Size in width and height 1-3 mm Zoom factor 2 to 10 Orientation 0°, 90°, 180°, 270°
Vector/TrueType fonts	Size in width and height 0.9-128 mm Variable zoom Orientation 360° in steps of 1°
Font styles	Bold, italic, underlined, outline, inverse - depending on the font type
Character spacing	Variable or Monospace for fixed character spacings

Graphics			
Graphic elements	Lines, arrows, rectangles, circles, ellipses - filled and filled with fading		
Graphic formats	PCX, IMG, BMP, TIF, MAC, GIF, PNG		
Barcodes			
Linear	Code 39, Code 93 Code 39 Full ASCII Code 128 A, B, C EAN 8, 13 EAN/UCC 128/GS1-128 EAN/UPC Appendix 2 EAN/UPC Appendix 5 FIM HIBC	Interleaved 2/5 Ident- and routing code of Deutsche Post Codabar JAN 8, 13 MSI Plessey Postnet RSS 14 UPC A, E, E0	
2D and stacked	DataMatrix Data Matrix Rectangle Extension QR code Micro QR code PDF 417 Micro PDF 417 UPS MaxiCode GS1 DataBar Aztec Codablock F RSS 14 truncated, limited, stacked, stacked omni-directional EAN/GS1 DataMatrix	All codes are variable as regards height, modular width and ratio; orientation 0°, 90°, 180°, 270° optional check digit, plain text printout and start/stop code depending on the type of code	
Software			
Label software	cablabel S3 Lite cablabel S3 Viewer cablabel S3 Pro cablabel S3 Print	■ ■ □ □	
Running also with	CODESOFT NiceLabel EASYLABEL BarTender		
Stand-alone operation		■	
WHQL certified Windows printer drivers for	Windows Vista Windows 7 Windows 8 Windows 8.1 Windows 10	Server 2008 Server 2008 R2 Server 2012 Server 2012 R2 Server 2016	■
Apple Mac OS X printer drivers	from version 10.6		■
Linux printer drivers	from CUPS 1.2		■
Programming	Printer language JScript abc Basic Compiler		■ ■
Integration	SAP Database Connector		■ ■
Emulation	ZPL (Data stream has to be tested in advance.)		□
Administration	Printer control Configuration in Intranet and Internet Network Manager (in preparation)		■ ■ ■


Label software cablabel S3

Designing, printing, administrating with cablabel S3

cablabel S3 opens up the full potential of cab devices.

First of all the label must be designed. Only when it comes to printing it has to be decided whether the label shall be processed on a label printer, a print and apply or marking laser system.

cablabel S3 is of a modular design which makes it adaptable to requirements step by step. To support functions like native JScript programming elements such as the JScript Viewer are embedded as plug-ins. The designer user interface and the JScript code are synchronized in real time. Special functions like the Database Connector or barcode testers can be integrated.

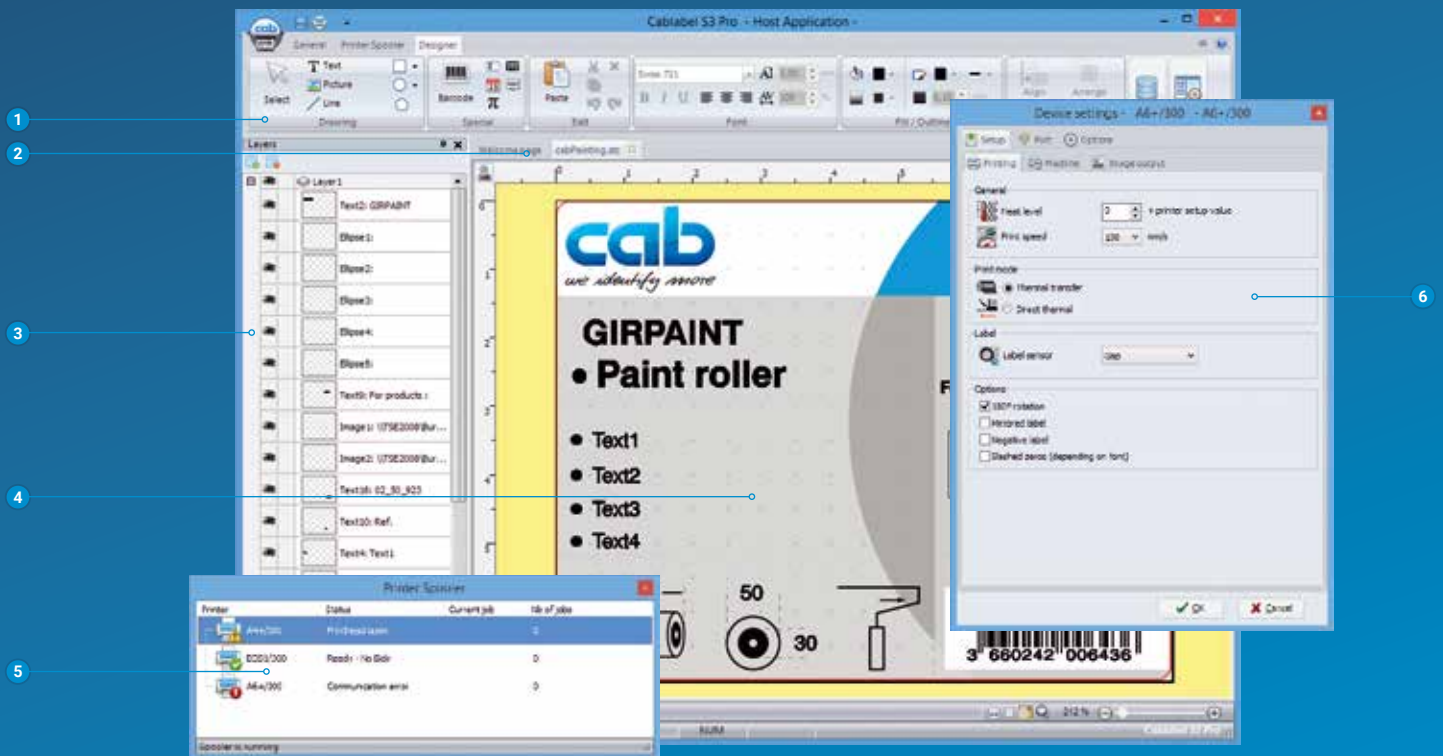

- 1 **Toolbar**
to create different label objects
- 2 **Tabs**
to quickly switch from one running label design to another
- 3 **Layers**
to manage different label objects
- 4 **Designer**
Label display in WYSIWYG mode to simplify the design
- 5 **Printer spooler**
to monitor all print jobs and printer status
- 6 **Drivers**
to manage settings and the communication with devices

Printing in stand-alone operation

This operating mode is the printer's ability to select and print labels even when it is not connected to a host system.

The label has to be designed with a software such as cablabel S3 or by direct programming with a text editor on a PC. Label formats, texts, graphics as well as database contents are stored on a memory card, a USB memory stick or in the internal IFFS memory.

Only variable data are sent to the printer via a keyboard, a barcode scanner, scales or other systems. With the Database Connector, these data are recalled from the host and printed.




For further information see
www.cab.de/en/cablabel





Printer control and administration

Printer drivers

To control the printer with a software other than cablabel S3, cab provides drivers in 32 / 64 bit for operating systems starting from Windows Vista, Mac OS 10.6 and Linux with CUPS 1.2.


 **Windows¹⁾ drivers**
cab printer drivers are certified according to WHQL. They ensure optimum stability on the Windows operating system.


 **Mac OS X²⁾ drivers**
cab provides CUPS-based printer drivers for Mac OS X applications.

 **Linux drivers³⁾**
The Linux drivers are CUPS-based.


Drivers are offered on the DVD delivered with the printer and for free download at www.cab.de/en/support


Printer programming

 **JScript**
To control the printer cab has developed the embedded programming language Jscript. See manual for free download at www.cab.de/en/programming

 **abc Basic Compiler**
In addition to JScript and as an integral part of the firmware it allows advanced printer programming before data are sent to printout. For example, external printer languages can be replaced without interfering in the current print job. Also data from other systems such as a scale, a barcode scanner or PLC can be integrated.


Printer integration


 **Printer Vendor Program**
As a partner in SAP's⁴⁾ Printer Vendor Program cab has developed a replace method to enable easy control of a cab printer via SAPScript from SAP R/3. Only variable data are sent to the printer by the host. Pictures and fonts that priorly had been stored in the local memory (IFFS, memory card, etc.) are merged.

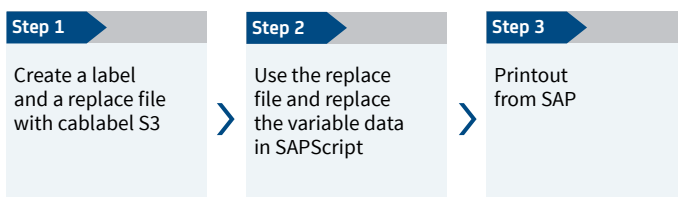


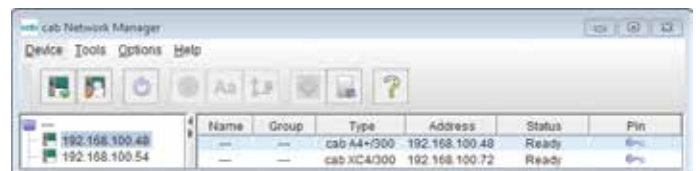
¹⁾ Windows is a registered trademark of Microsoft Corporation
²⁾ MAC OS X is a registered trademark of Apple Computer, Inc.
³⁾ Only for device series SQUIX (except of SQUIX MT), MACH 4S, EOS, Hermes+ and PX
⁴⁾ SAP and all corresponding logos are trademarks or registered trademarks of SAP SE


Printer administration

 **Configuration in Intranet and Internet**
The HTTP and FTP server integrated in the printer via standard programs like a web browser or FTP clients allows printer control and configuration, firmware updates and memory card administration. Via email or SNMP, the SNMP and SMTP client datagram sends status, warning and error messages to administrators and users. Time and date are synchronized by a time server.

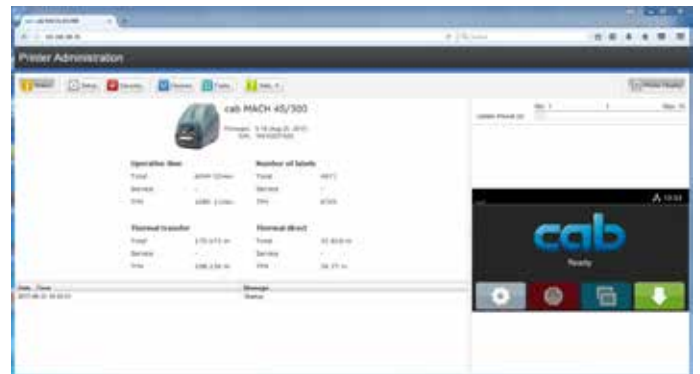



 **Network Manager** in preparation
It is possible to simultaneously manage several printers within the network. Control, configuration, firmware updates, memory card administration, data synchronization and PIN administration are supported from one single location.








 **Database Connector**
Printers connected to a network may directly access data from a central ODBC or OLEDB-ready database and print it on a label. While printing, data can be rewritten to the database.













Delivery program

Pos.	Part no.	Printers										
1.1		5984630 5984631	Label printer MACH 4.3S/200B Label printer MACH 4.3S/300B									
	Type B with tear-off edge	5984632 5984633	Label printer MACH 4S/300B Label printer MACH 4S/600B									
1.2		5984634 5984635	Label printer MACH 4.3S/200P Label printer MACH 4.3S/300P									
	Type P with peel-off function	5984636 5984637	Label printer MACH 4S/300P Label printer MACH 4S/600P									
1.3		5984638 5984639	Label printer MACH 4.3S/200C Label printer MACH 4.3S/300C									
	Type C with cutter	5984640 5984641	Label printer MACH 4S/300C Label printer MACH 4S/600C									
Scope of delivery:												
DVD:	<p>Label printer Power cable Type E+F, length 1.8 m Connecting cable USB, length 1.8 m Operator's manual DE/EN</p> <p>Operator's manual in more than 20 languages Configuration manual DE/EN/FR Service manual DE/EN Spare parts list DE/EN Programming manual EN WHQL certified Windows printer drivers for <table border="0"> <tr> <td>Windows Vista</td> <td>Server 2008</td> </tr> <tr> <td>Windows 7</td> <td>Server 2008 R2</td> </tr> <tr> <td>Windows 8</td> <td>Server 2012</td> </tr> <tr> <td>Windows 8.1</td> <td>Server 2012 R2</td> </tr> <tr> <td>Windows 10</td> <td>Server 2016</td> </tr> </table> Apple Mac OS X printer drivers DE/EN/FR Linux printer drivers DE/EN/FR Label software cablabel S3 Lite cablabel S3 Viewer Database Connector</p>		Windows Vista	Server 2008	Windows 7	Server 2008 R2	Windows 8	Server 2012	Windows 8.1	Server 2012 R2	Windows 10	Server 2016
Windows Vista	Server 2008											
Windows 7	Server 2008 R2											
Windows 8	Server 2012											
Windows 8.1	Server 2012 R2											
Windows 10	Server 2016											

Pos.	Part no.	Wear parts
2.1		5977382.001 Print head 4.3/200
	5977383.001 Print head 4.3/300	
	5977444.001 Print head 4/300	
	5977380.001 Print head 4/600	
2.2		5984649.001 Print roller DR4

Pos.	Part no.	Extra equipment
2.3		5984223.001 Print roller DR4-M25
2.4		5984224.001 Print roller DR4-M50
2.5		5984228.001 Print roller DR4-M80

Pos.	Part no.	Extra equipment
2.6		5977370 SD memory card 8 GB
2.7		5977730 USB memory stick 8 GB
2.8		5978912.001 USB WLAN stick 2.4 GHz 802.11b/g/n
2.9		5977731 USB WLAN stick with rod antenna 2.4 GHz 802.11b/g/n + 5 GHz a/n/ac
2.10		5977732 USB Bluetooth adapter
2.11		5550818 Connecting cable RS232 C 9/9 pin, length 3 m
2.12		5984648.001 Roll holder
2.13		5984647.001 Ribbon holder
2.14		5540750 External rewinder ER4/210

Pos.	Part no.	Label software
11.7		5588000 cablabel S3 Lite
	5588001 cablabel S3 Pro 1 WS	
	5588100 cablabel S3 Pro 5 WS	
	5588101 cablabel S3 Pro 10 WS	
	5588150 cablabel S3 Pro 1 additional licence	
	5588151 cablabel S3 Pro 4 additional licences	
	5588152 cablabel S3 Pro 9 additional licences	
	5588002 cablabel S3 Print 1 WS	
	5588105 cablabel S3 Print 5 WS	
	5588106 cablabel S3 Print 10 WS	
5588155 cablabel S3 Print 1 additional licence		
5588156 cablabel S3 Print 4 additional licences		
5588157 cablabel S3 Print 9 additional licences		
	in preparation	cablabel S3 Print Server
11.10	9009950	Programming manual EN, printed copy

Scopes of delivery, design and technical specifications correspond to the date of the printing. Subject to change. The data provided in the catalog do not represent any warranty or guarantee.



Information is also available on the Internet
www.cab.de/en/mach4s

cab Product overview

Label printers MACH1, MACH2
in the lower price segment



Label printers MACH 4S
where little space is available



Label printers EOS1
Desktop device for label rolls up to diameter 152 mm



Label printers EOS4
Desktop device for label rolls up to diameter 203 mm



Label printers SQUIX 2
Industrial device for print widths up to 57 mm



Label printers SQUIX 4
Industrial device for print widths up to 108 mm



Label printers SQUIX 6
Industrial device for print widths up to 168 mm



Label printers A8+
Industrial device for print widths up to 216 mm



Label printers XD4T
for double-sided printing



Label printers XC
for two-color printing



Print and apply systems Hermes+
for automation



Print and apply systems Hermes C
for two-color printing and applying



Print modules PX
to be integrated in labeling machines



Labels
made from more than 400 materials



Ribbons
in wax, resin and resin/wax qualities



Label software cablabel S3
Design, print, control



Label dispensers HS, VS
for horizontal or vertical dispense



Labeling heads IXOR
to be integrated in labeling machines



Marking lasers FL+
with output powers 10 to 50 Watt



Laser marking systems XENO 1
for single workpieces and series



Germany
cab Produkttechnik GmbH & Co KG
Karlsruhe
Phone +49 721 6626 0
www.cab.de

France
cab Technologies S.à.r.l.
Niedermodern
Phone +33 388 722501
www.cab.de/fr

USA
cab Technology, Inc.
Chelmsford, MA
Phone +1 978 250 8321
www.cab.de/us

Mexico
cab Technology, Inc.
Juárez
Phone +52 656 682 4301
www.cab.de/es

Taiwan
cab Technology Co., Ltd.
Taipei
Phone +886 (02) 8227 3966
www.cab.de/tw

China
cab (Shanghai) Trading Co., Ltd.
Shanghai
Phone +86 (021) 6236 3161
www.cab.de/cn

China
cab (Shanghai) Trading Co., Ltd.
Guangzhou
Phone +86 (020) 2831 7358
www.cab.de/cn

South Africa
cab Technology (Pty) Ltd.
Randburg
Phone +27 11 886 3580
www.cab.de/za

cab // 820 distribution partners in more than 80 countries

cab
we identify more